	IECEx Certificate of Conformity				
	INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification System for Explosive Atmospheres for rules and details of the IECEx Scheme visit www.iecex.com				
Certificate No.:	IECEx BAS 11.0022X	Page 1 of 4	Certificate history:		
Status:	Current	Issue No: 4	13506 2 (2020-07-14)		
Date of Issue:	2022-06-14		Issue 1 (2014-04-10) Issue 0 (2011-12-12)		
Applicant:	Topworx Incorporated 3300 Fern Valley Road Louisville Kentucky 40213 United States of America				
Equipment:	D2-FF Valvetop Switchbox				
Optional accessory:					
Type of Protection:	Intrinsic Safety				
Marking:	Ex ib IIC T4 Gb (-20°C ≤ Ta ≤ +50 Ex tb IIIC T80°C Db IP67 (-20°C ≤				
Approved for issue o Certification Body:	n behalf of the IECEx	Mr R S Sinclair			
Position:		Technical Manager			
Signature: (for printed version)		RSS-Qui			
Date: (for printed version)		14/6/2022			
2. This certificate is not	cchedule may only be reproduced in full. transferable and remains the property of th enticity of this certificate may be verified by	e issuing body. visiting www.iecex.com or use of this QR Code.			
Certificate issued SGS Baseefa Li Rockhead Busir Staden Lane Buxton, Derbys United Kingdom	mited ness Park hire, SK17 9RZ		SGS		

	IECEx Certificate of Conformity				
Certificate No.:	IECEx BAS 11.0022X	Page 2 of 4			
Date of issue:	2022-06-14	Issue No: 4			
Manufacturer:	Topworx Incorporated 3300 Fern Valley Road Louisville Kentucky 40213 United States of America				
Manufacturing locations:	Emerson Automation Fluid Contro & Pneumatics Poland Sp. z o. o. (Emerson AFCP Poland Sp. z o.o.) Kurczaki 132 Lodz 93-331 Poland	Emerson Machinery Equipment (Shenzhen) Co. Ltd 101 Building 2, COFCO Park Honglang North 2nd Road Xin'an Street Bao'an District Shenzhen 518101 China			
IEC Standard list be found to comply with	elow and that the manufacturer's quality	resentative of production, was assessed and tested and found to c system, relating to the Ex products covered by this certificate, was s.This certificate is granted subject to the conditions as set out in IE	assessed and		
STANDARDS : The equipment and to comply with the f		in the schedule of this certificate and the identified documents, was	s found		
IEC 60079-0:2017 Explosive atmospheres - Part 0: Equipment - General requirements Edition:7.0					
IEC 60079-11:2011 Edition:6.0	Explosive atmospheres - Part 11: Ec	upment protection by intrinsic safety "i"			
IEC 60079-31:2013 Edition:2	Explosive atmospheres - Part 31: Ec	upment dust ignition protection by enclosure "t"			
		compliance with safety and performance requirements essly included in the Standards listed above.			
TEST & ASSESSM A sample(s) of the		e examination and test requirements as recorded in:			
Test Reports:					
GB/BAS/ExTR11.0	276/00 GB/BAS/ExTF	22.0046/00			
Quality Assessmen					
GB/BAS/QAR06.00)20/10 GB/SIR/QAR(7.0025/09 NL/DEK/QAR11.0004/06			



IECEx Certificate of Conformity

Certificate No .: **IECEx BAS 11.0022X**

Date of issue:

Page 3 of 4

Issue No: 4

EQUIPMENT:

Equipment and systems covered by this Certificate are as follows:

2022-06-14

The D2-FF Valvetop Switchbox is designed to control and provide feedback of the position of an actuator / valve combination located in the hazardous area via a Foundation Fieldbus or FISCO network.

The equipment comprises an enclosure either made of stainless Steel (DXS models), coated aluminium (DXP models) or glass fibre reinforced resin enclosure (DXR models) housing a FF CC Electronic Unit component certified under IECEx BAS 10.0125U, up to two certified piezoelectric pilot valves, up to two limit switches and an optional potentiometer position sensor. A shaft assembly passes through the enclosure base to which either a potentiometer is connected to provide positional information from the actuator / valve connected or a disc with metallic contacts is fitted to activate limit switches fitted around the shaft, or a combination of both. Based on the inputs from the devices fitted, the FF CC Electronic Unit processed the information and communicates it via the Fieldbus network. The FF CC Electronic Unit also controls the operation of the pilot valves, when fitted, which are connected to the pneumatic valves attached to the side of the enclosure.

On top of the Switchbox enclosure a visual indicator is fitted which mechanically connects to the shaft assembly inside to provide an indication of the position of the actuator / valve to which the equipment is connected.

External connections to the equipment are made using a plug and socket connector with screw terminals via one of two threaded entries on either side of the enclosure. The installation of external connections and the plugging of the unused entry must be carried out using appropriate Ex e or Ex n cable glands or blanking plug components with a minimum IP rating of IP67 certified by an approved certification body.

See Certificate Annex for model range and electrical parameters.

SPECIFIC CONDITIONS OF USE: YES as shown below:

1. When fitted, only non-combustible fluids may be used in the pneumatic circuit.

2. DXR Models Only: The equipment shall only be installed in a location where there is a low risk of mechanical damage. The enclosure constitutes a potential electrostatic risk and must only be cleaned with a damp cloth.



Date of issue:

IECEx Certificate of Conformity

Certificate No.: IECEx BAS 11.0022X

2022-06-14

Page 4 of 4

Issue No: 4

DETAILS OF CERTIFICATE CHANGES (for issues 1 and above) Variation 4.1


To permit update of assessment standards to IEC 60079-0:2017 Edition 7, IEC 60079-11:2011 Edition 6 and IEC 60079-31:2013 Edition 2.

ExTR: GB/BAS/ExTR22.0046/00

File Reference: 21/0624

Annex:


IECEx BAS 11.0022X Annex Issue 0.pdf



D2-FF Valvetop Switchbox

Model Range

The following model range is covered by this certificate:

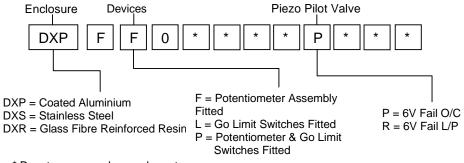

* Denotes any number or character

Input Parameters: Bus Connector J1 pins 1 to 3

I.S Parameters

Ui	=	30V	Ci	=	5nF
l _i	=	380mA	Li	=	10µH
Pi	=	1.5W			

FISCO Parameters

Ui	=	17.5V	Ci	=	5nF
l _i	=	380mA	Li	=	10µH
P_i	=	5.32W			